

TABLE TOP CUP SEALING MACHINES

OUTPUT:
12 PCs/min.

The machines are ideal for packaging wide range of products in plastic cups sealed with aluminum foil lids. Practical and easy to use. The best quality and prices.

The machines include:

- moving platform
- heating press
- timer



MOD. PLB-4S

MOD. POB-1S



MOD. POB-4S

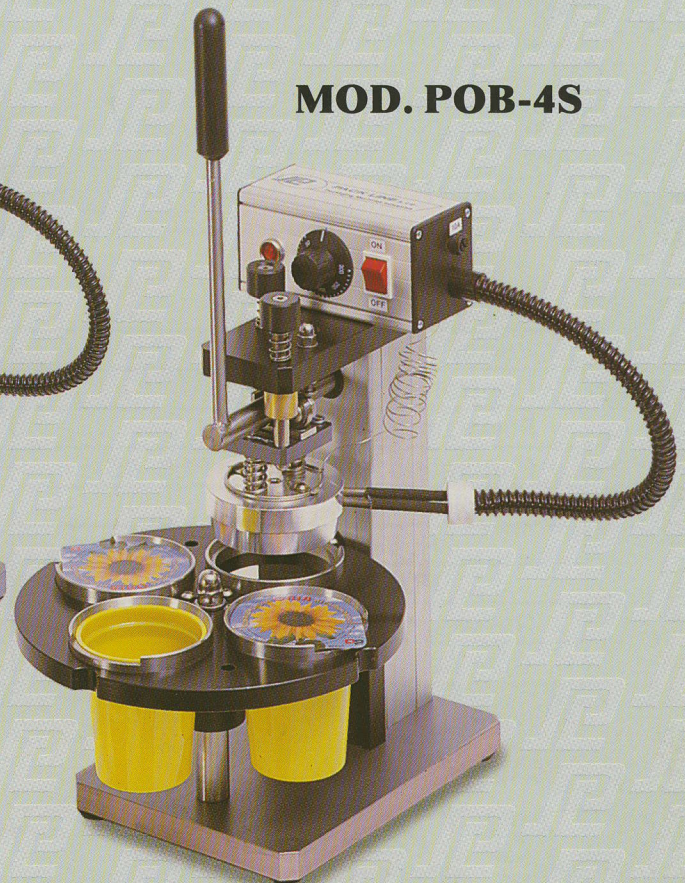


TABLE TOP CUP SEALING MACHINES

SPECIAL FEATURES AND OPTIONS

- Fast and simple: can be easily handled by one operator.
- Fast and reliable sealing system that assures a high quality result.
- Elementary and easy maintenance of the machine.
- Various dimensions of socket and platform are available.
- All product contact parts are stainless steel. The machines are manufactured using stainless steel, anodized aluminum and plastic, all of which conform to EEC standards for food grade materials.
- Economically priced with high quality finished product.



METHOD OF OPERATION:

- insert the cup into the socket of the movable platform and adjust the sealing timer
- place the aluminum lid on the top of the cup
- move the platform with cup and lid exactly to the position under the heating press
- according to the sealing time, the heating press starts to seal the lid onto the cup automatically (mod. PLB-4S) or by pulling the handle (mod. POB-1S, POB-4S)

TECHNICAL DATA

	EUROPEAN STANDARD	USA STANDARD
Power supply	230 V, 50 Hz	110 V, 60 Hz
Control voltage	24 V	24 V
Power usage	0.8 kW	1 HP
Pneumatic feeding (for PLB-4S)	6-8 bar	90-120 psi
Net dimensions:		
PLB-4S, POB-4S	380x280x430 mm	15x11x17 inch
POB-1S	210x280x430 mm	8x11x17 inch
Net weight	13 kg	28,7 lb
Time per cycle	6-8 seconds	6-8 seconds

NOTE:

1. "OPTION" OF "OPTIONAL" REFERS TO PARTS, SERVICES OR OPERATIONS ON SPECIAL ORDER AND AT ADDITIONAL COST.
2. IN KEEPING WITH PACK LINE'S POLICY OF ONGOING PRODUCT IMPROVEMENTS, THE DESIGNS AND SPECIFICATIONS IN THIS PUBLICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE.